

MCH 13-16-18 ETS SUPER SILENT EVO



BC DIN 232 bar



BC INT



BC DIN 300 bar

STANDARD

- Automatic condensate drain and autostop
- Electric switchboard with hourmeter
- Maxifilter filtration
- Interstage pressure gauge
- Cabin temperature thermostat/auto shutoff
- Oil level switch/auto shutoff
- Phase controller that prohibits reverse rotation
- 2 filling hoses 120 cm length
- 2 valves BC for 232 bar version
- 2 valves BC for 300 bar version

OPTIONAL





Refrigerator



Filling hoses

- Final hp Refrigerator RF 500 on demand
- Filling hoses length: 1.50 m - 2.0 m - 3.0 m - 4.0 m - 5.0 m - 8.0 m - 10.0 m

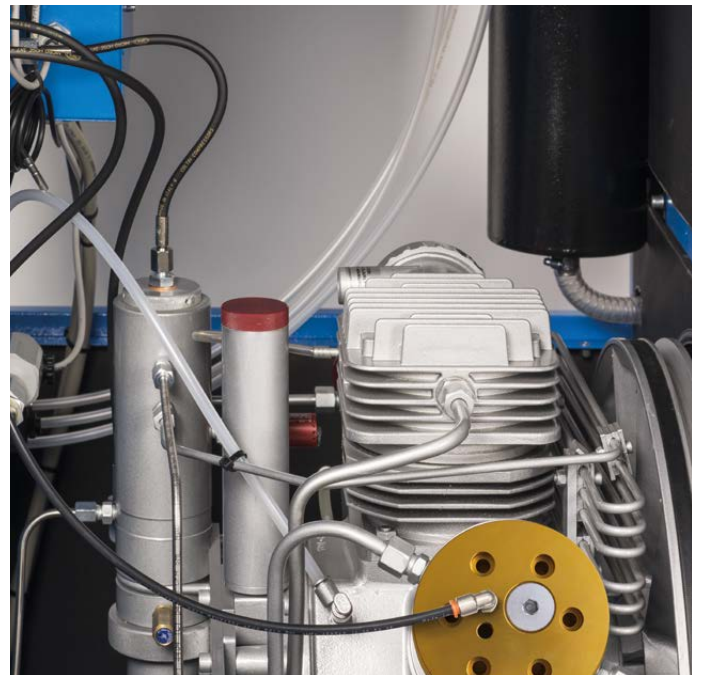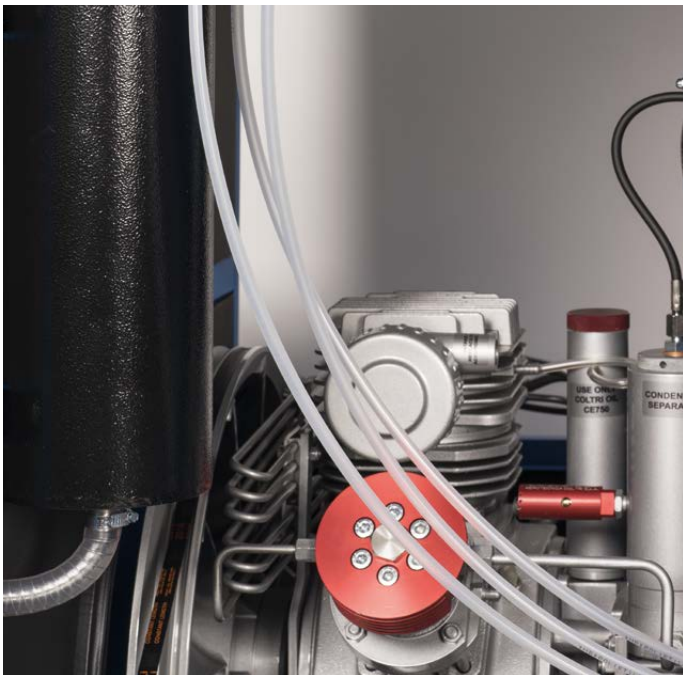

TECHNICAL DATA

	MCH 13	MCH 16	MCH 18
DRIVEN BY	THREE-PHASE ELECTRIC MOTOR	THREE-PHASE ELECTRIC MOTOR	THREE-PHASE ELECTRIC MOTOR
CHARGING RATE PUMPING UNIT	235 l/min - 14.1 m ³ /h - 8.3 CFM FAD	315 l/min - 18.9 m ³ /h - 11,1 CFM FAD	330 l/min - 19.8 m ³ /h - 11.65 CFM FAD
FILLING TIME*	8 min. 30 sec.	6 min. 20 sec.	6 min.
WORKING PRESSURE	232 - 330 bar / 3300 - 4700 psig	232 - 330 bar / 3300 - 4700 psig	232 - 330 bar / 3300 - 4700 psig
DIMENSION (W x H x D)	90 x 132 x 93 cm 35.4" x 52" x 36.61"	90 x 132 x 93 cm 35.4" x 52" x 36.61"	90 x 132 x 93 cm 35.4" x 52" x 36.61"
NET WEIGHT APPROX.	225 kg / 496 lbs	235 kg / 518 lbs	235 kg / 518 lbs
NOISE LpA	66 dB	68 dB	68 dB

*Filling time cylinder 10 l-0/200 bar (measured by filling cylinder from 0 to 200 bar ±5%)