

MCH 6 EM - ET SILENT



DIN 232 bar



DIN 300 bar



INT

STANDARD

- Filling hose 120 cm length

- 1 filling connection (among the ones available)

- Hour-tacho meter

- Maxifilter


- Scarico automatico con serbatoio

OPTIONAL

- Pressure maintaining valve + BC filling valve



Pressure maintaining valve

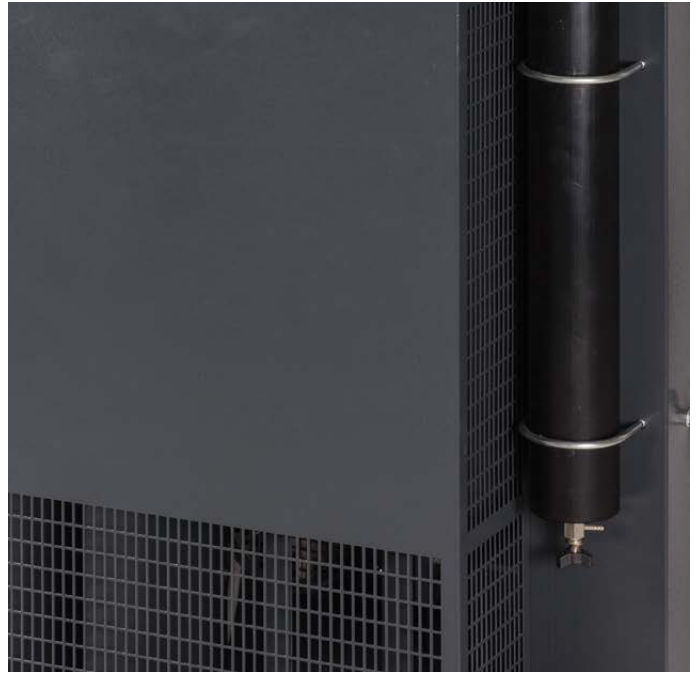

TECHNICAL DATA

DRIVEN BY	SINGLE-PHASE ELECTRIC MOTOR OR THREE-PHASE ELECTRIC MOTOR
CHARGING RATE	100 l/min - 6 m ³ /h
FILLING TIME	10 l-0-200 bar 25 min. (MCH 6 EM Silent) / 10 l-0-200 bar 20 min. (MCH 6 ET Silent)
WORKING PRESSURE	232 - 300 bar
DIMENSION (W x H x D)	70 x 110 x 67 cm / 27.5" x 43.3" x 27.4"
NET WEIGHT APPROX.	84.5 kg / 186.3 lb
NOISE LpA	66 dB

MCH 6 is designed for filling a single cylinder. It is neither designed nor intended for filling cascade storage systems of any kind.
 Information for onboard use with electric generator starting load Ampere *42 A **87 A. Generator power @ starting (without pressure) 4 KVA